


## BK70AAH

### Nickel-Metal Hydride Batteries [Backup for Infrastructure/Standard (H)]

#### Dimensions

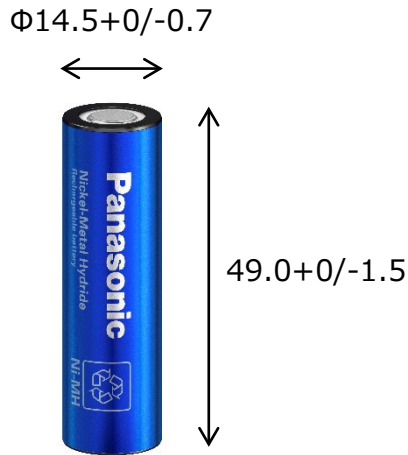

#### Specifications

Diameter			14.5 +0 / -0.7 mm
Height			49.0 +0 / -1.5 mm
Approximate Weight			18g
Nominal Voltage			1.2V
Discharge Capacity *1		Average *2	750 mAh
		Rated (min.)	700 mAh
Approx. Internal Impedance at 1000Hz at charged state.			25 mΩ
Charge		Standard	70 mA X 16 hrs.
		Rapid *3	350 mA X 2.4 hrs.
		Low rate	35 mA X 32 hrs. 23 mA X 48 hrs.
Ambient Temperature	Charge	Low rate	-10 °C to 60 °C
		Standard	
		Rapid	-10 °C to 45 °C
	Discharge		-10 °C to 60 °C
	Storage	<1 year	-20 °C to 35 °C
		<6 months	-20 °C to 45 °C
		<1 month	-20 °C to 55 °C
		<1 week	-20 °C to 65 °C

\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.



\*2 For reference only.

\*3 Need specially designed control system. Please contact Panasonic Energy for details.


#### Attention

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic Energy when determining charge/discharge specs, warning label contents and unit design.

#### Typical charge characteristics

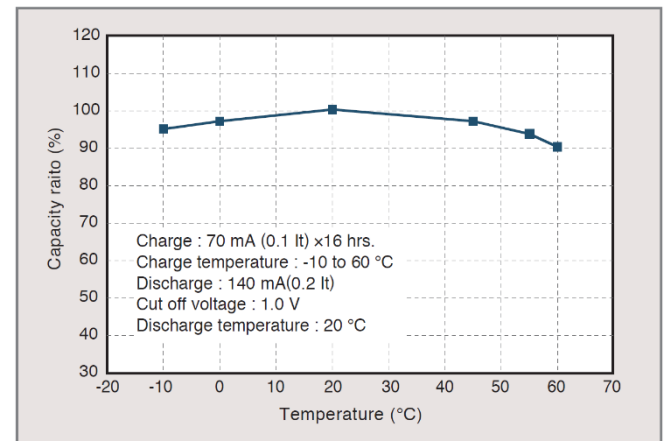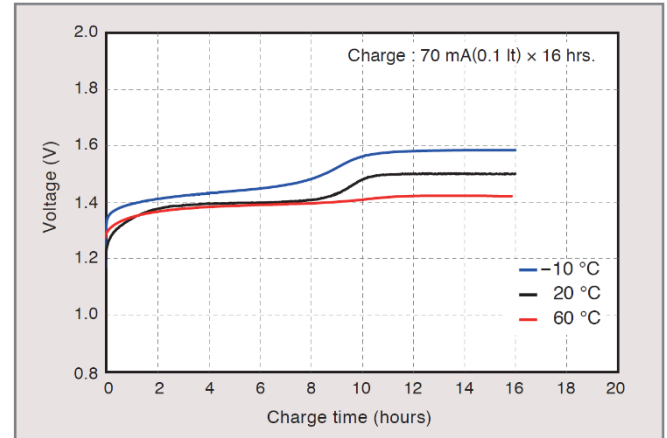

#### Typical discharge characteristics

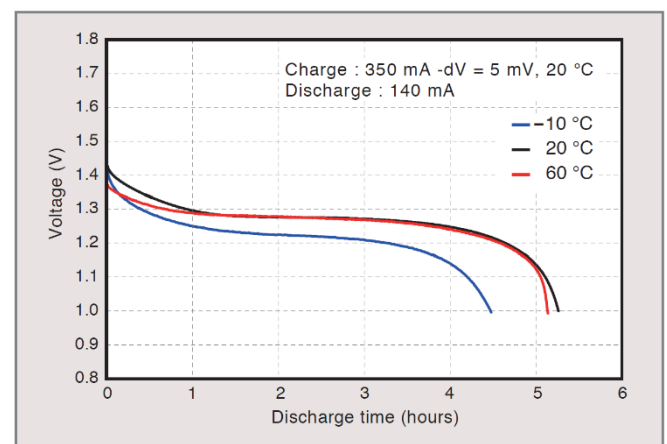

**Panasonic Energy Co., Ltd.**

As of July, 2024. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.

