


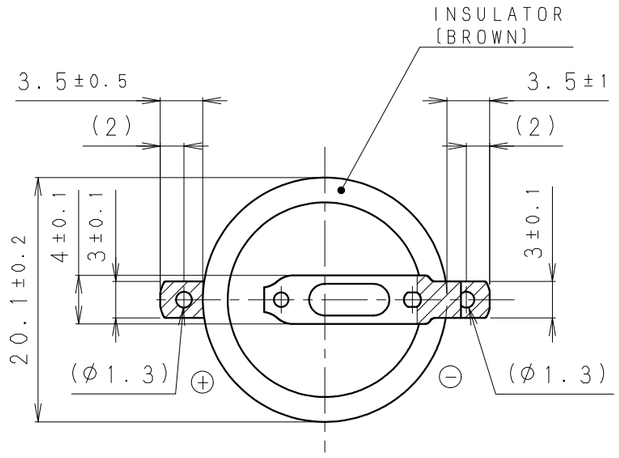




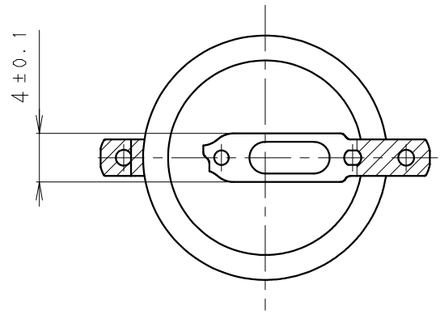

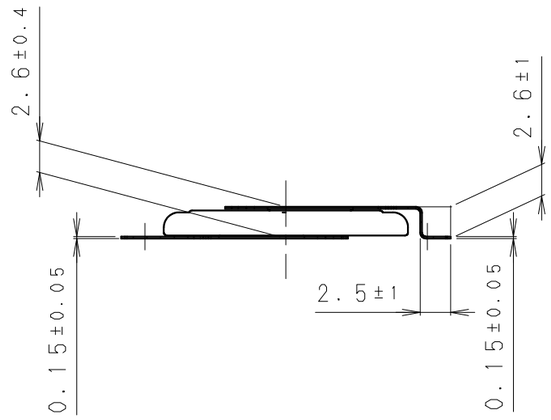

NOTE
1. NOMINAL VOLTAGE:3V
2. TAB WELDING STRENGTH OVER 14.7N
3. TAB MATERIAL:STAINLESS STEEL WITH TIN PLATING ▨
4. ( ):REFERENCE DIMENSION AND ANGLE
5. PANASONIC IS INDEMNIFIED FROM ANY FAILURE OF THE BATTERY CAUSED BY DIRECT TOUCH OF EITHER SOLDER OR A SOLDERING IRON TO THE BATTERY BODY.
6. PLEASE PAY CLOSE ATTENTION TO FOLLOWINGS SO THAT YOU AVOID A POSSIBLE EXTERNAL SHORT CIRCUIT.
   (1) THE DESIGN OF THE CIRCUIT BOARD PATTERN
   (2) THE METHOD OF SECURING THE BATTERY ON THE BOARD
   (3) THE PROCESS OF MOUNTING THE BATTERY ON THE BOARD

PRODUCT NO.	VL-2020/F1A	SCALE 2:1
DRAWING NO.	PD-VL-2020/F1A-G	UNIT:mm